


NOTE:  
 PAD DIMENSIONS (WIDTH AND DEPTH)  
 DO NOT INCLUDE ADDITIONAL AREA  
 NEEDED TO INSTALL ENCLOSURE  
 WALLS. ADD AREA AS NEEDED.





\*PLACEMENT OF GATE POSTS MUST  
 PROVIDE A MINIMUM OF 12' CLEAR  
 SPACE AT OPENING

APPROVED BY	REVISED DATE	CITY OF OLYMPIA	STD. PLAN NO.
	6/28/06	SOLID WASTE CONCRETE PAD	8-1
CITY ENGINEER			

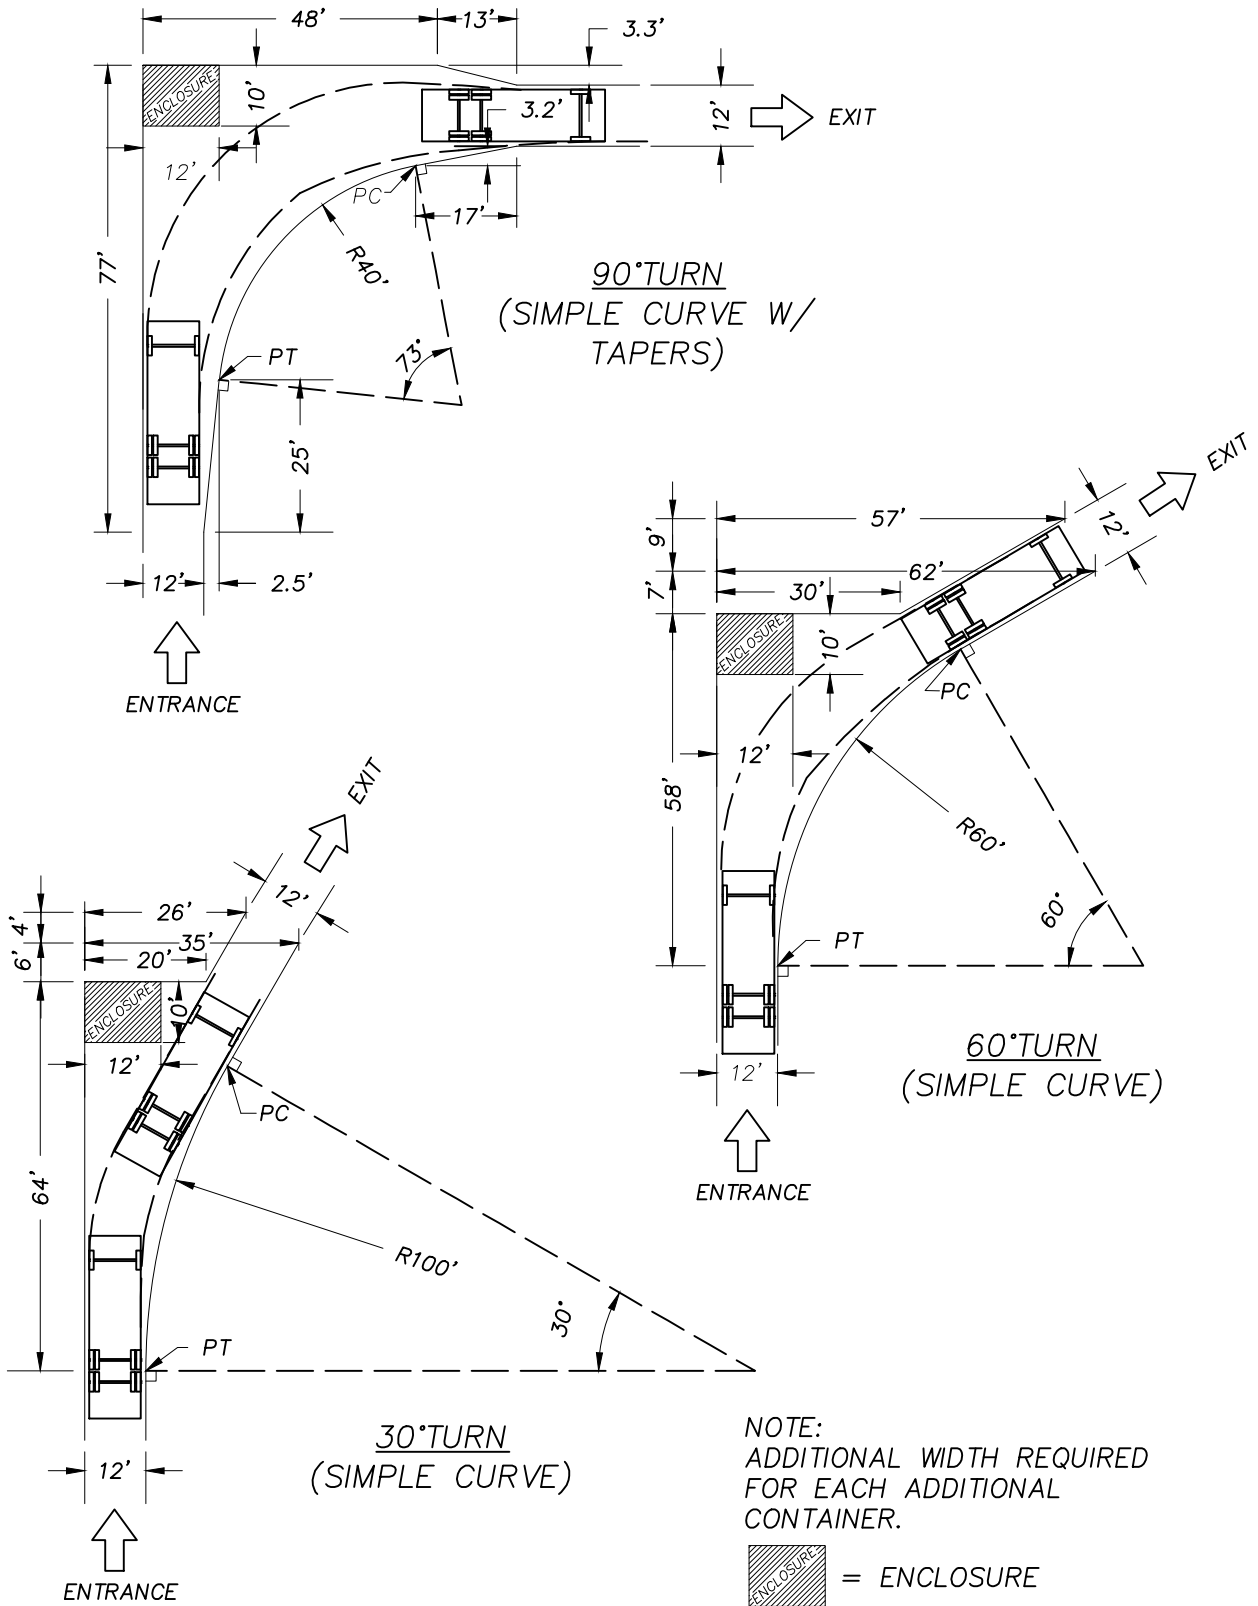


N.T.S.

APPROVED BY	REVISED DATE	<b>CITY OF OLYMPIA</b>	STD. PLAN NO.
	2/26/2013	MINIMUM DESIGN FOR FRONT LOAD	8-2A
CITY ENGINEER			

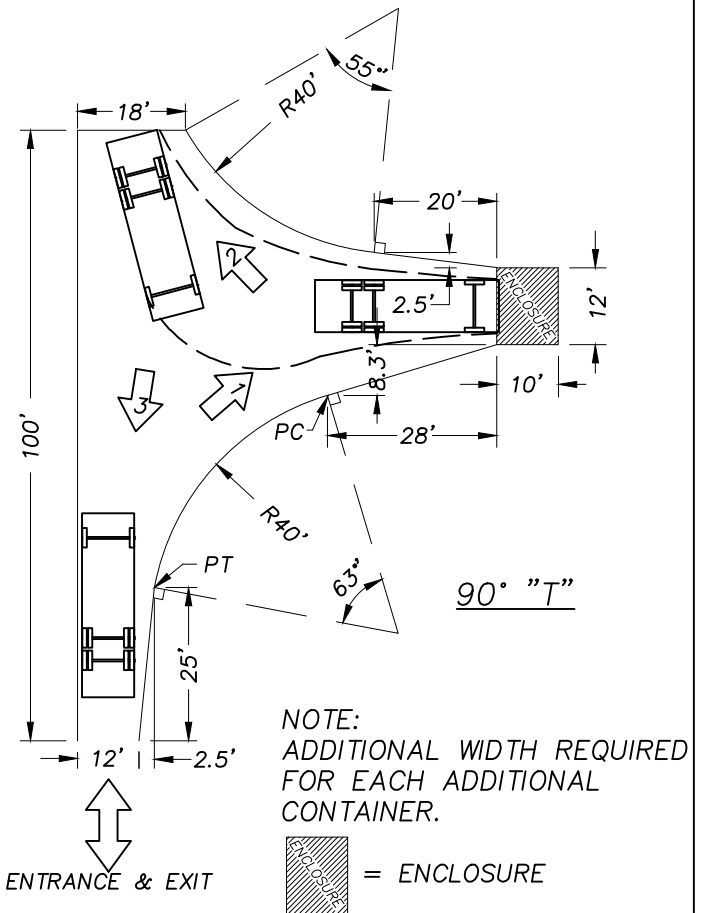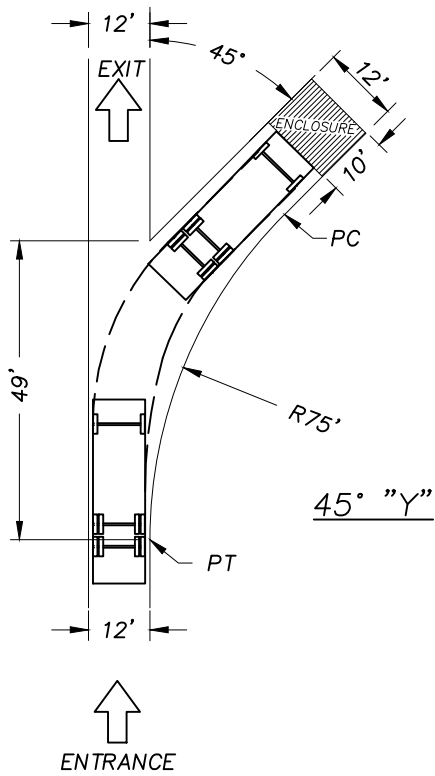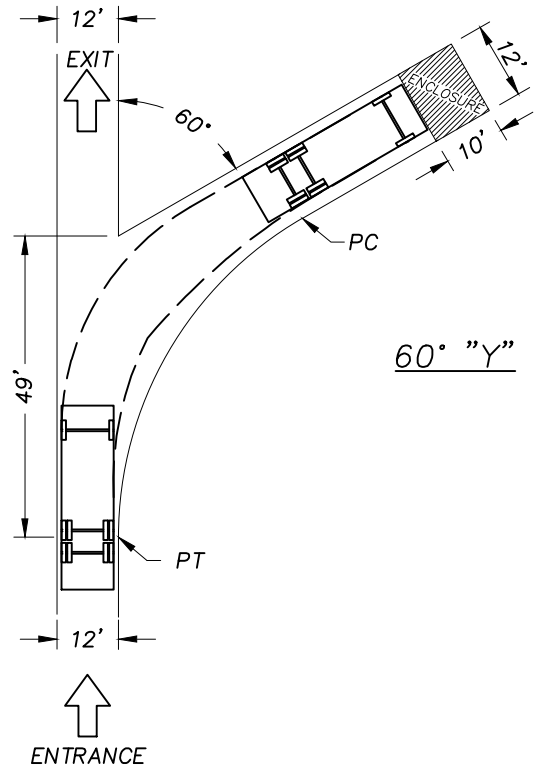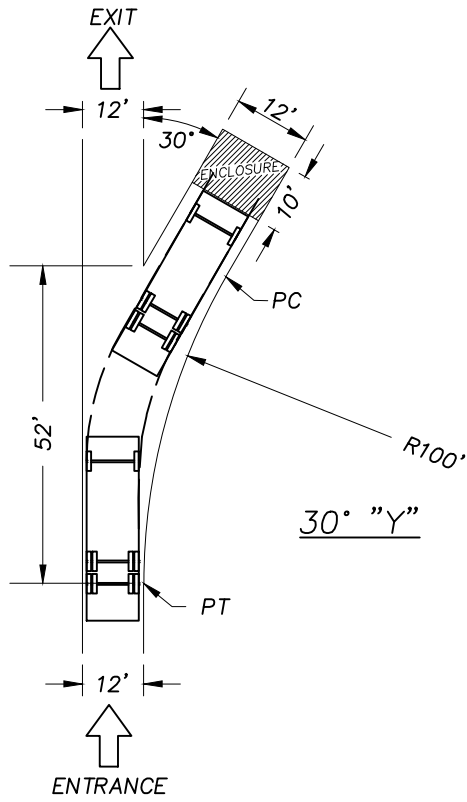


NOTE:  
ADDITIONAL WIDTH REQUIRED  
FOR EACH ADDITIONAL  
CONTAINER.

 = ENCLOSURE


N.T.S.

APPROVED BY	REVISED DATE	CITY OF OLYMPIA	STD. PLAN NO.
	2/26/2013	MINIMUM DESIGN FOR FRONT LOAD	8-2B
CITY ENGINEER			

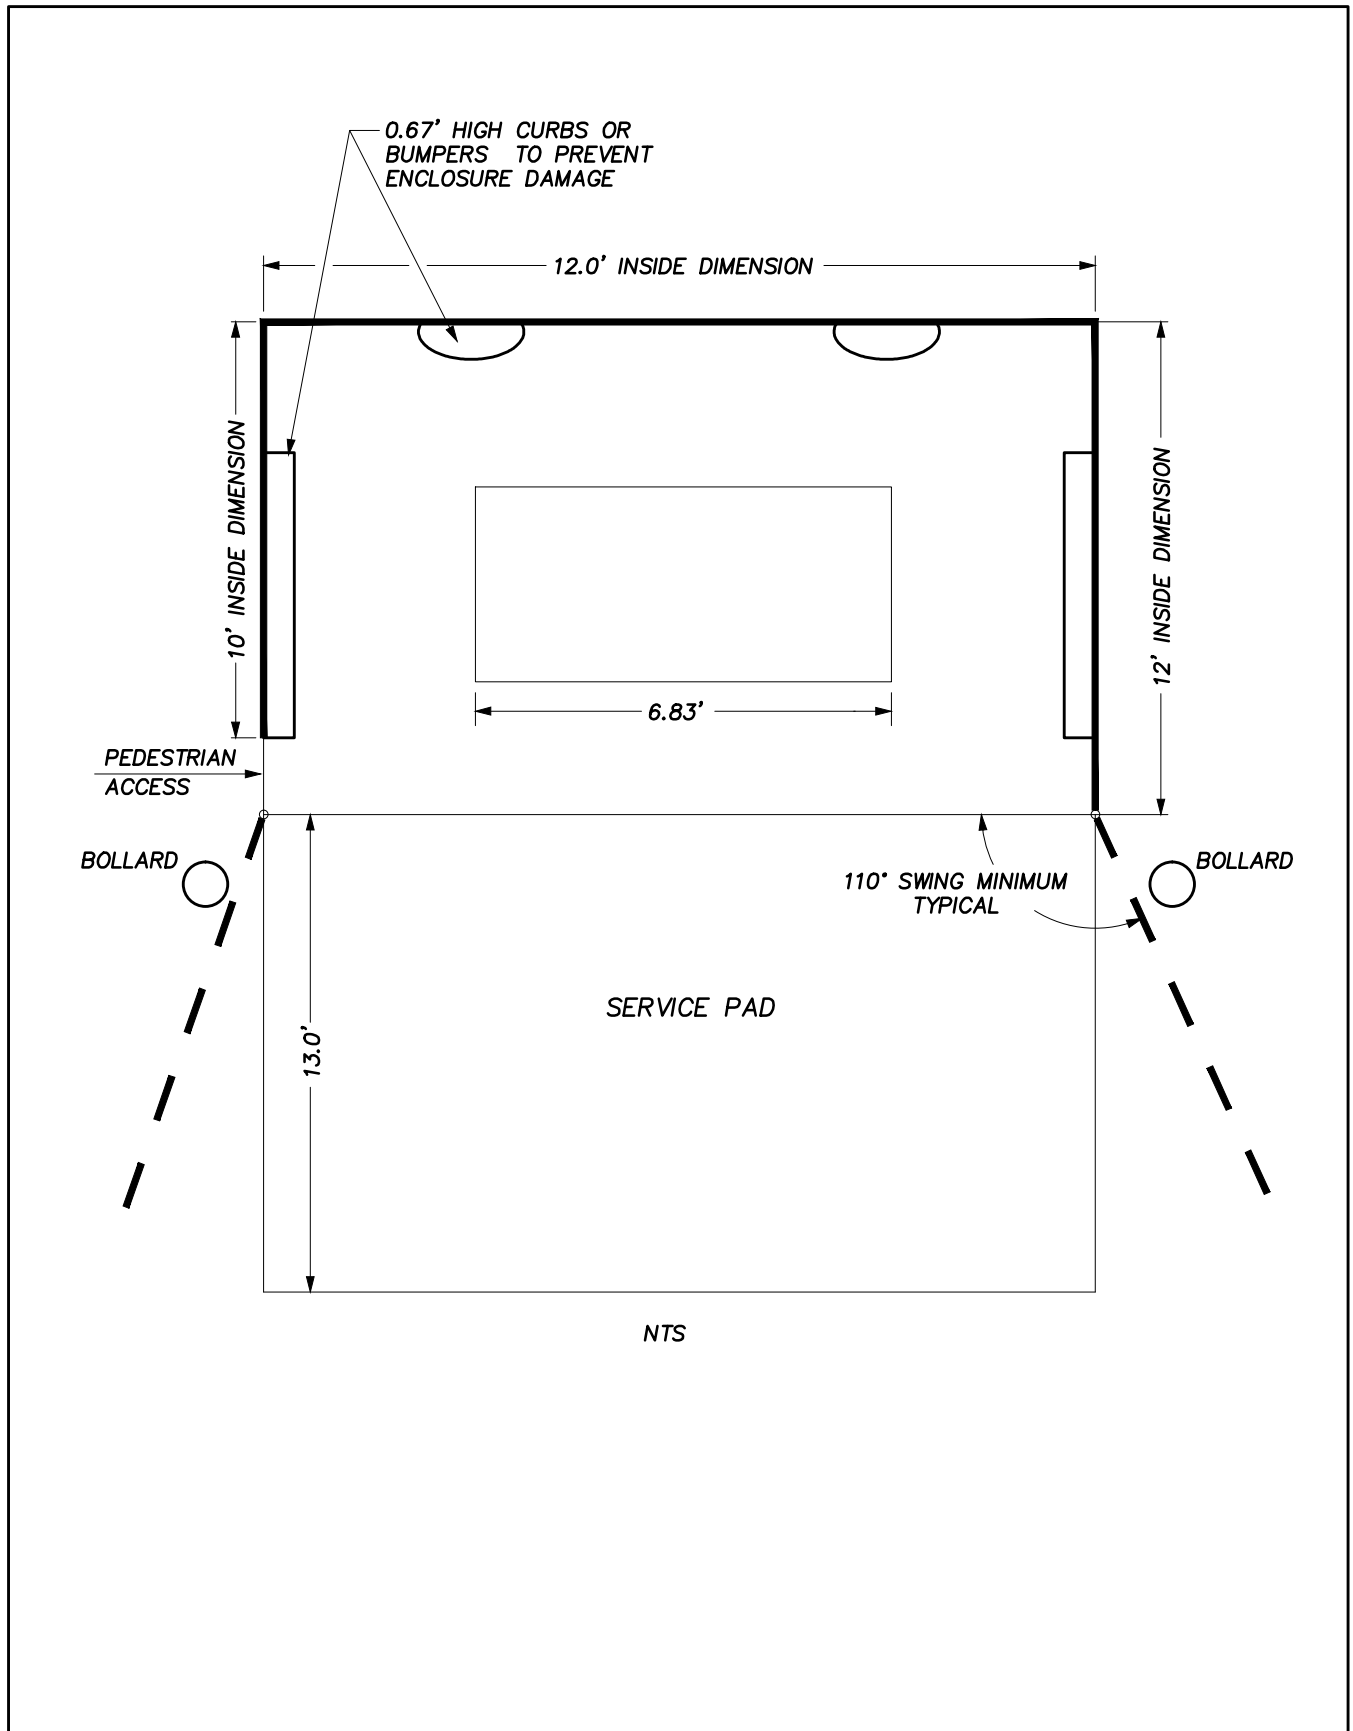

SINGLE FRONT LOAD ENCLOSURE


ILLUSTRATION  
A

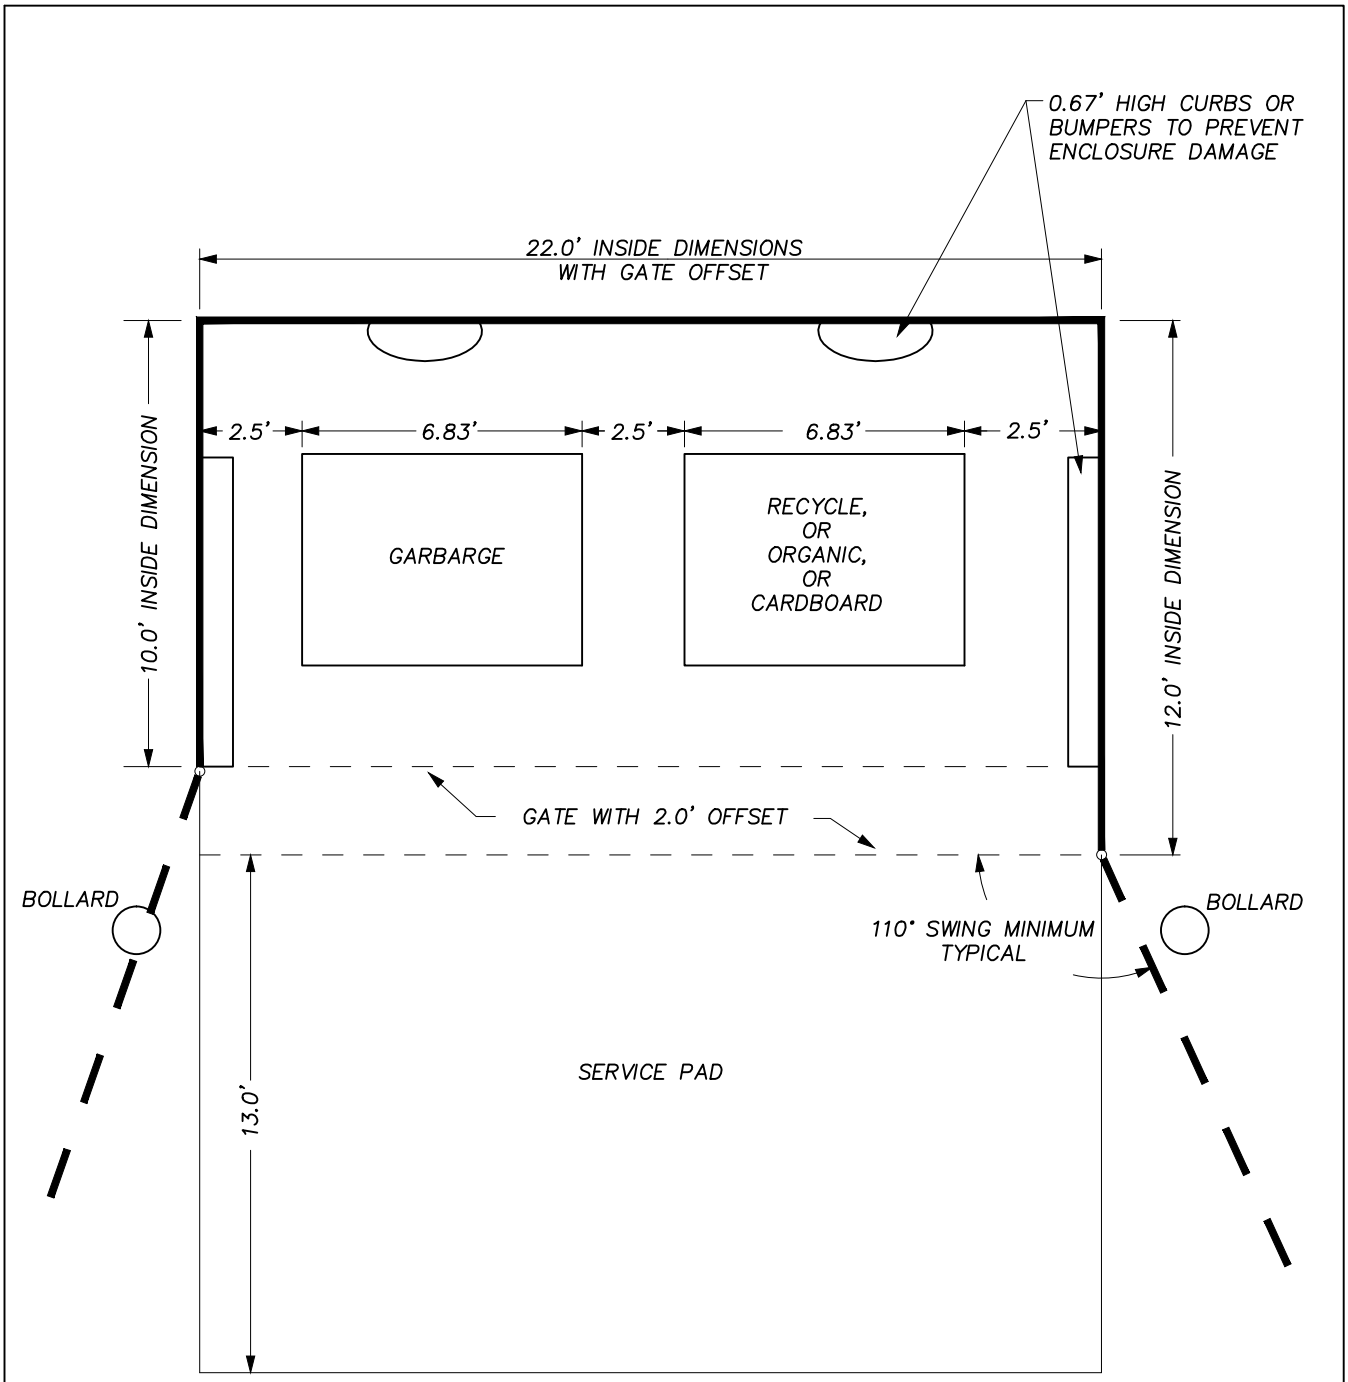


N. T. S.

FRONT-LOAD SIDE BY SIDE ENCLOSURE

ILLUSTRATION  
B

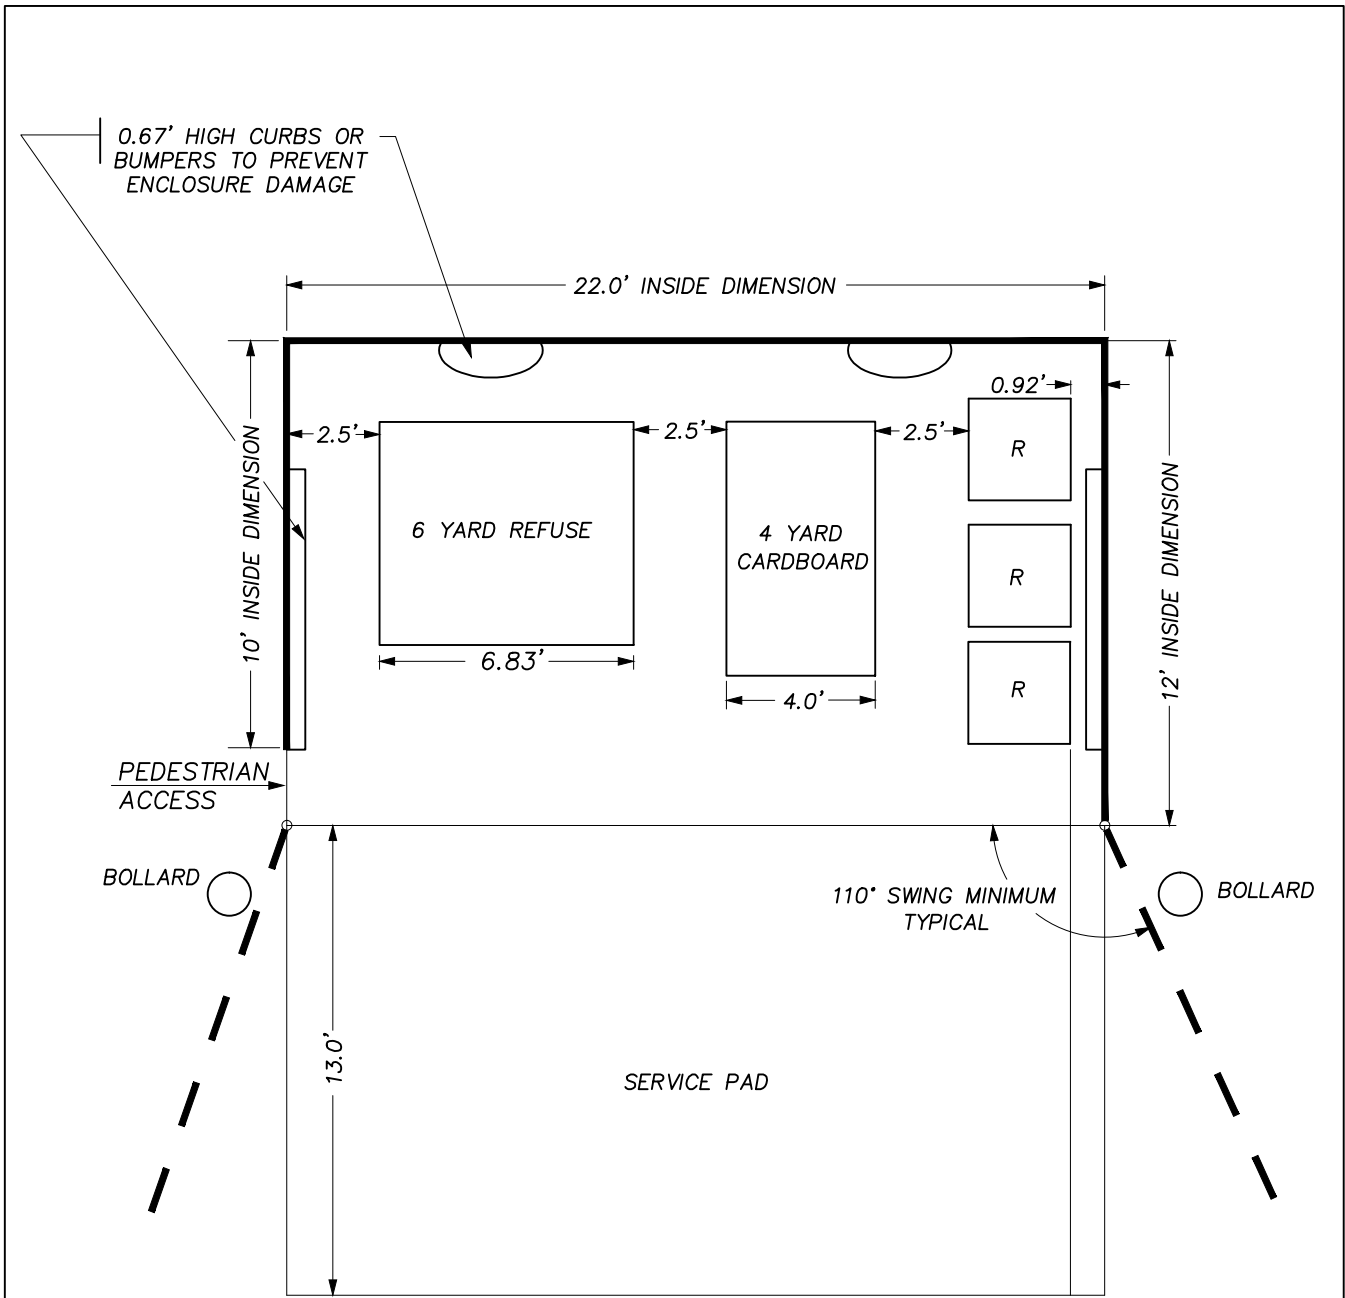

FRONT-LOAD WITH RECYCLE CARTS ENCLOSURE ILLUSTRATION C

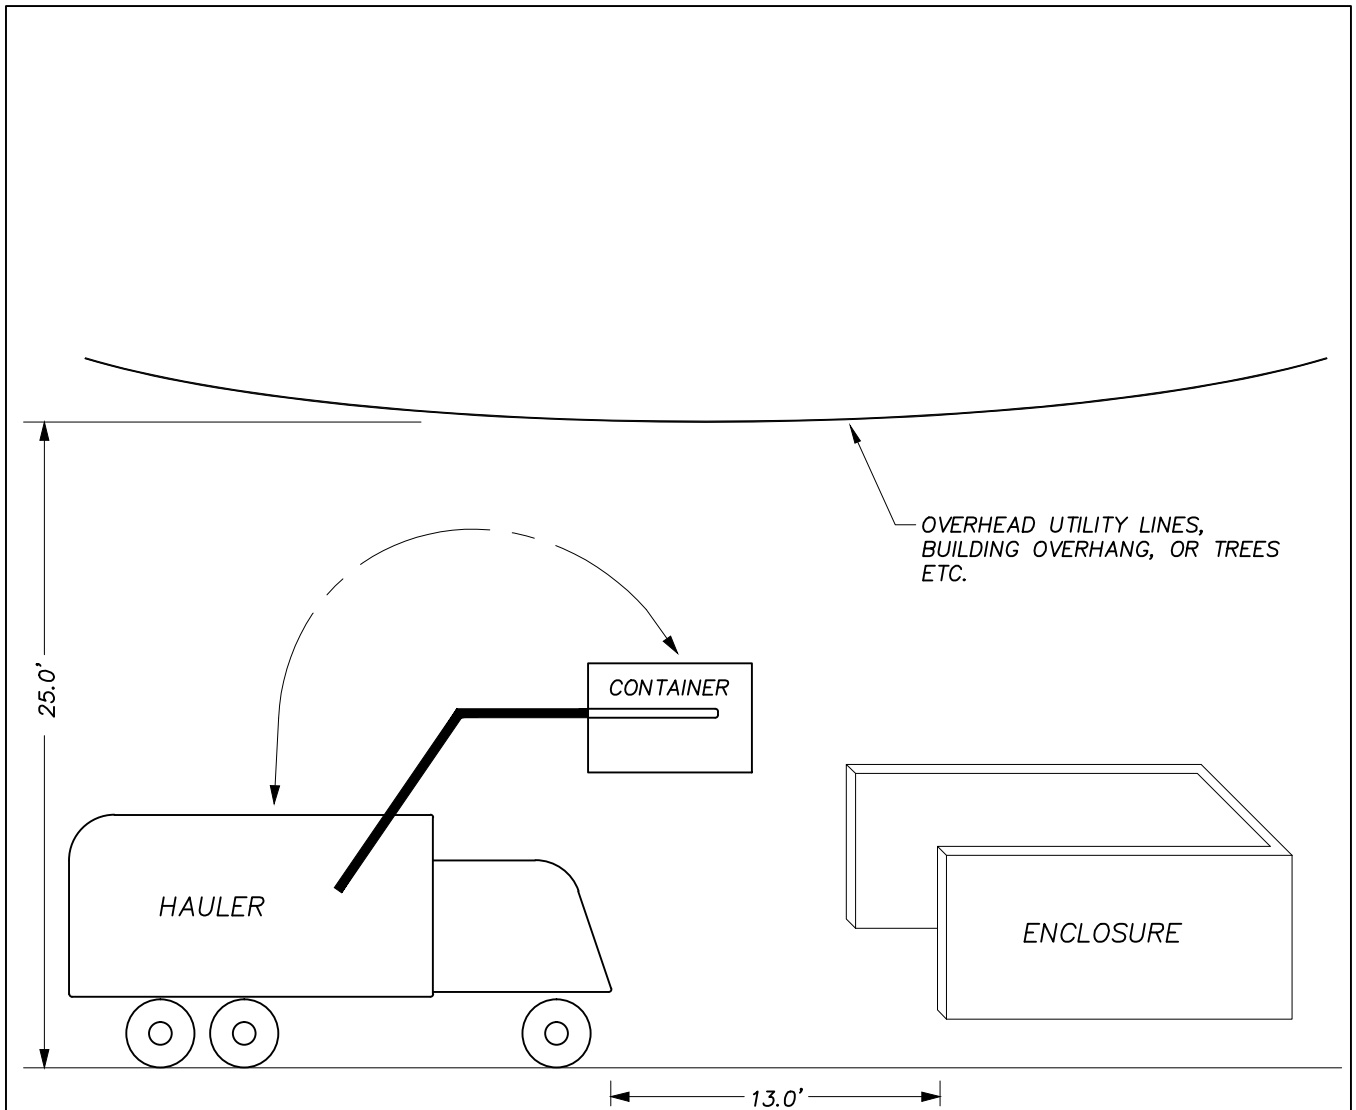


NOTE:  
 25 FOOT CLEARANCE OF OVERHEAD OBSTRUCTIONS IS NECESSARY TO LIFT  
 AND EMPTY THE CONTAINER.

NTS

FRONT-LOAD OVERHEAD CLEARANCE

ILLUSTRATION  
 D

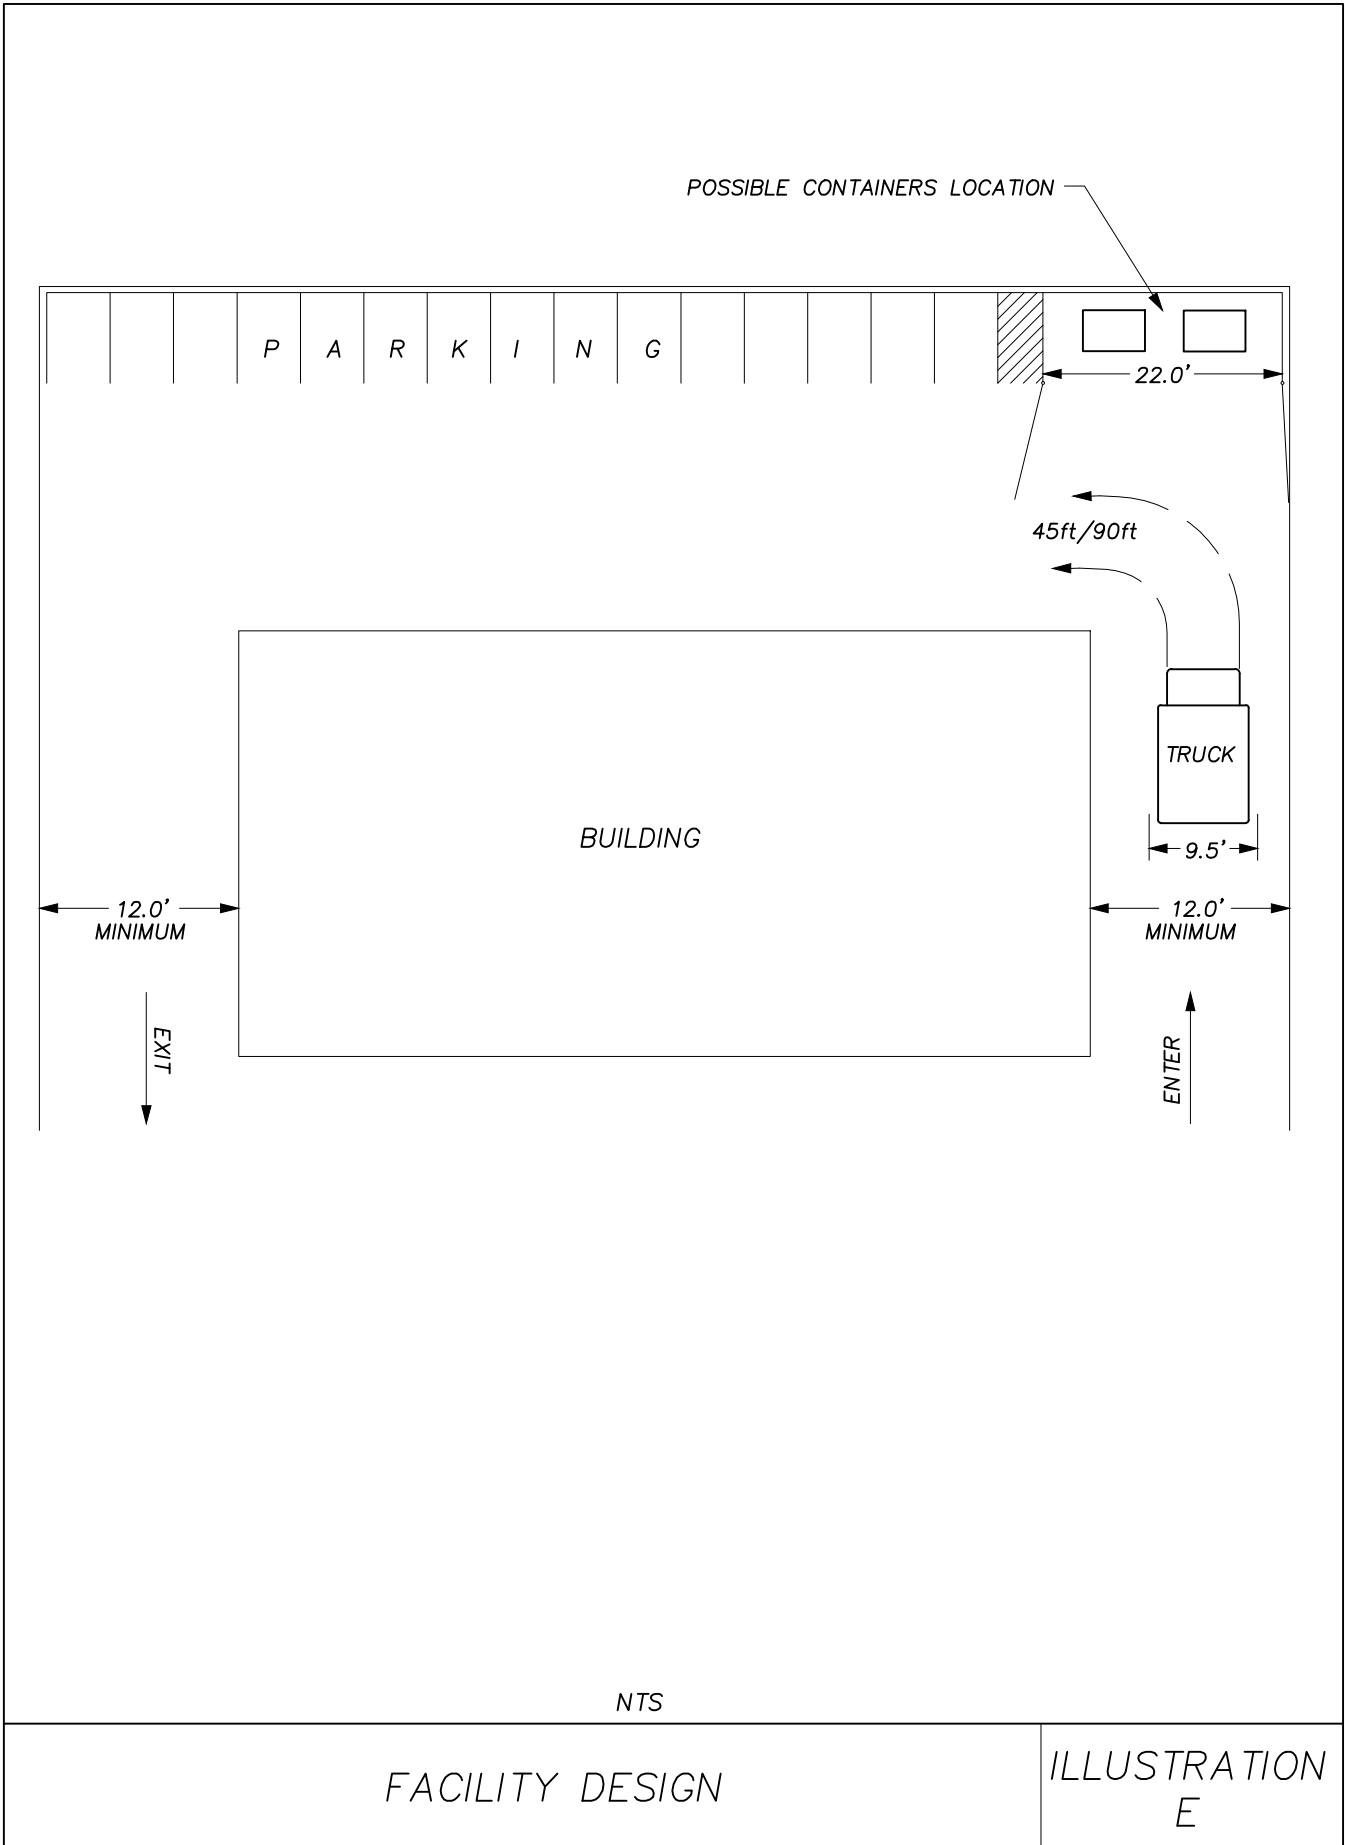


NTS

FACILITY DESIGN


ILLUSTRATION  
E




DIRECT ACCESS EXAMPLE  
(PREFERRED)

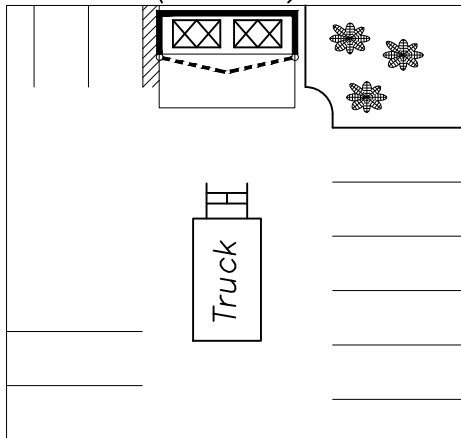

ANGLED DIRECT ACCESS EXAMPLE  
ACCEPTABLE WITH APPROVAL 30 DEGREES

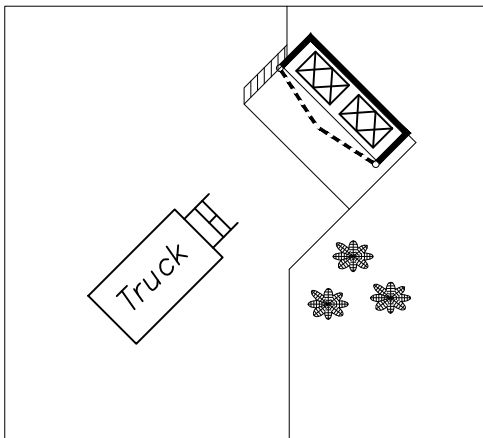


NON-DIRECT ACCESS EXAMPLE  
NOT ACCEPTABLE

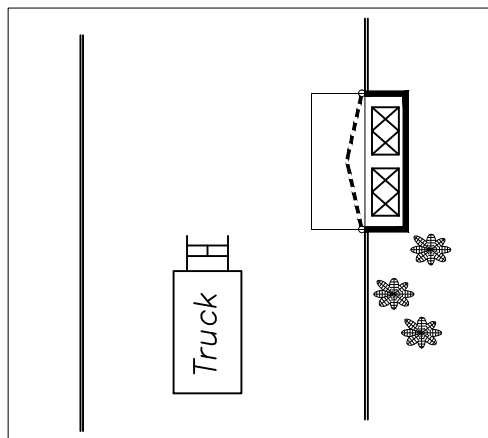

NTS

FRONT-LOAD ENCLOSURE ACCESS EXAMPLES

ILLUSTRATION  
F

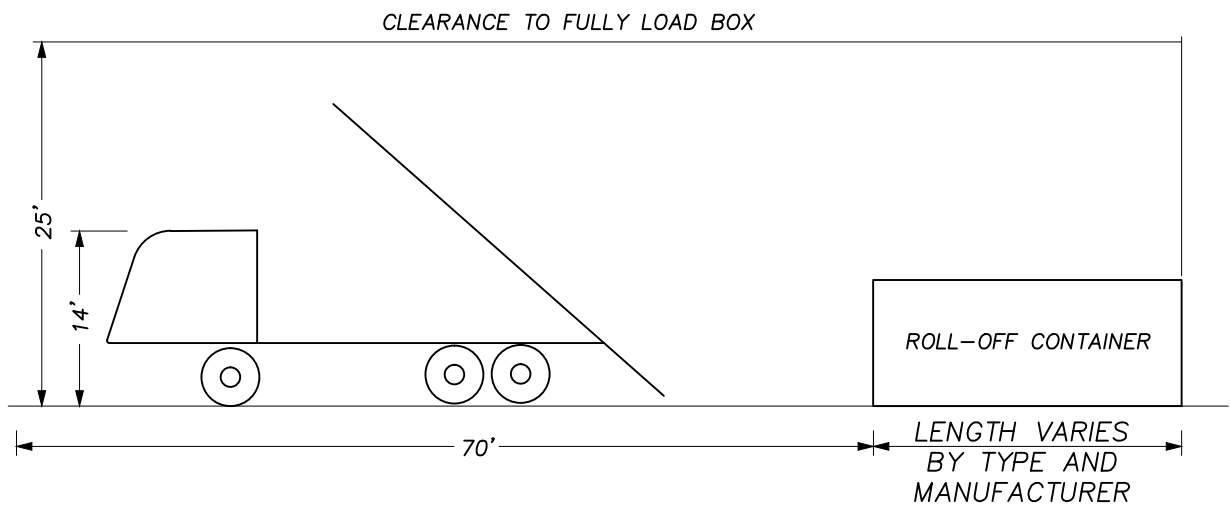


NTS

NOTES:

1. ALLOW A MINIMUM HORIZONTAL DISTANCE OF 70 FEET TO LOAD / UNLOAD CONTAINER SAFELY.
2. 25 FOOT VERTICAL CLEARANCE REQUIRED FOR LOADING AND UNLOADING.

ROLL-OFF CONTAINER ACCESS

ILLUSTRATION  
G

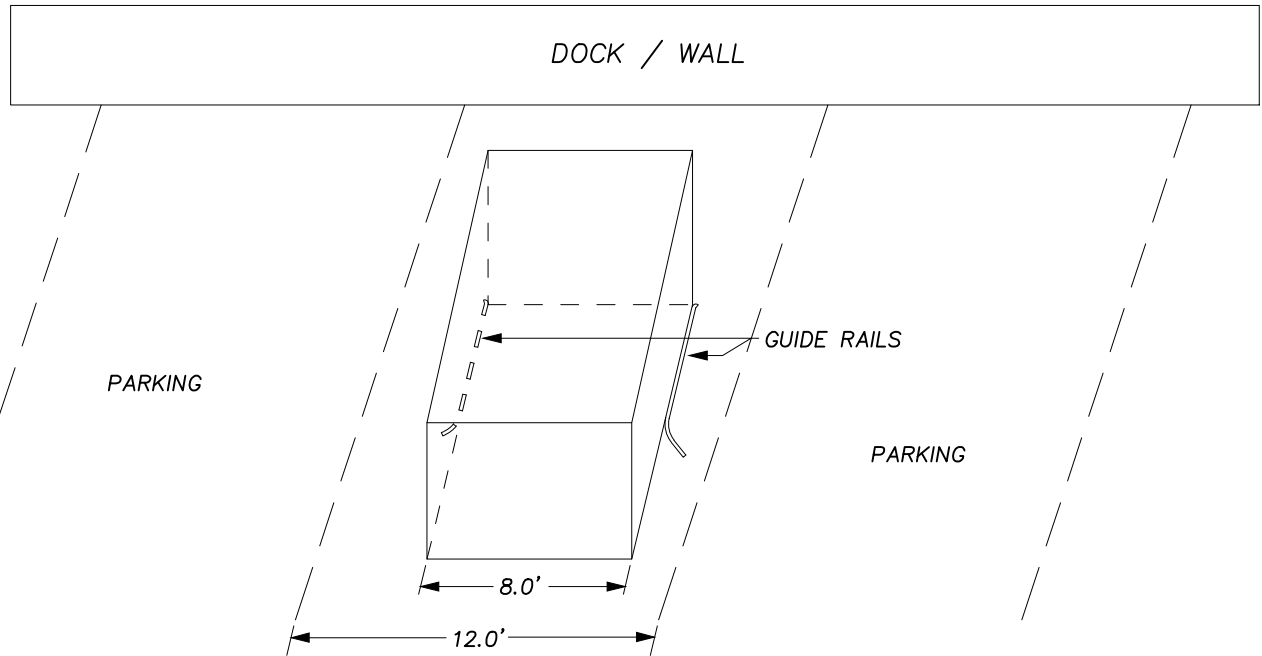

NTS

NOTES:

1. THIS ILLUSTRATION DEPICTS TOP LOADING DROP BOX OR SIDE LOADING COMPACTOR.
2. ALLOW 12 FOOT WIDE ACCESS FOR DRIVER TO PHYSICALLY CHECK THE SIDES AND REAR OF THE BIN PRIOR TO LOADING ONTO THE VEHICLE.

ROLL-OFF CONTAINER PLACEMENT

ILLUSTRATION  
H